

DK
ADVARSEL

Følgende operationer bør kun udføres på modulet i spændingsløs tilstand og under ESD-sikre forhold:
Installation, ledningsmontage og -demontering.
Fejfinding på modulet.
Reparation af modulet må kun foretages af PR electronics A/S.

ADVARSEL

PR Loop Link programmeringsenheden må ikke benyttes til kommunikation med moduler installeret i Ex-område.
Enhederne skal installeres i henhold til den tilhørende installationsvejledning ved montering i eksplorationsfaglig område. System 6300 skal monteres på DIN-skine efter DIN EN 60715.

SIKKERHEDSREGLER**Safety Instructions****Receipt and unpacking**

Unpack the device without damaging it. The packing should always follow the device until this has been permanently mounted. Check at the receipt of the device whether the type corresponds to the one ordered.

Environment

Avoid direct sunlight, dust, high temperatures, mechanical vibrations and shock, as well as rain and heavy moisture. If necessary, heating in excess of the stated limits for ambient temperatures should be avoided by way of ventilation.

Mounting

Only qualified technicians who are familiar with the technical terms, warnings, and instructions in this installation guide and who are able to follow these should connect the device.

Should there be any doubt as to the correct handling of the device, please contact your local distributor or, alternatively, PR electronics A/S.

Mounting and connection of the device should comply with national legislation for mounting of electric materials, i.e. wire cross section, protective fuse, and location. Descriptions of input / output and supply connections are shown in the product manual and on the side label.

Calibration and adjustment

During calibration and adjustment, the measuring and connection of external voltages must be carried out according to the specifications of this installation guide. The technician must use tools and instruments that are safe to use.

Cleaning

When disconnected, the device may be cleaned with a cloth moistened with distilled water.

PC programming of SYSTEM 6300

The device is configured to the present task by way of a PC or PR electronics A/S' communications interface Loop Link. The device can be configured with or without a connected supply voltage as the communications interface supplies the necessary voltage to the set-up. The communications interface is galvanically isolated to protect the PC port. Communication is 2-way to allow the retrieval of the device set-up to the PC and to allow the transmission of the PC set-up to the device. For users who do not wish to do the set-up themselves, the device can be delivered configured according to customer specifications: input type, measurement range, sensor error detection, and output signal.

Electrical specifications

Specifications range	-40°C to +85°C
Supply voltage,	8.0...35 VDC
Forsyningsspænding,	8.0...35 VDC
6333A	8.0...35 VDC
6333B	8.0...30 VDC
Kalibreringstemperatur	20...28°C
Relativ fugtighed	< 95% RH (ikke kond.)
Mål	109 x 23.5 x 104 mm
Kapslingsklasse	IP20
Indgangstyper:	
Pt100	-200°C...+850°C
Ni100	-60°C...+250°C
Lin. R	0 Ω...10000 Ω
Strømudgang:	
Signalområde	4...20 mA
Min. signalområde	16 mA
Belastningsmodstand, Ω	≤ (forsyn.-8.0 V)/0.023
Godkendelser:	
EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011
Overholde myndighedskrav:	
EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility avec les normes:

CEM	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Approvals:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Observed authority requirements:

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU

Compatibility:

|
<td
| |


ATEX Installation drawing 6333QA01-V2R0

! For safe installation of 6333B and 6343B the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area. Year of manufacture can be taken from the first two digits in the serial number.

ATEX Certificate KEMA 09ATEX 0147 X
Marking Ex II 1 G Ex ia IIC T6..T4 Ga
II 1 D Ex ia IIIC Da
I M 1 Ex ia I Ma

Standards EN 60079-0 : 2012, EN 60079-11 : 2012,
EN 60079-26 : 2007

Hazardous area Zone 0, 1, 2, 20, 21, 22

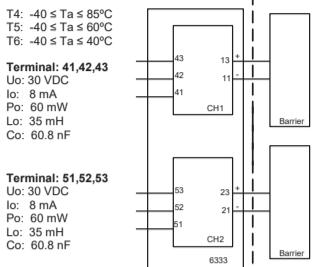

General installation instructions

To avoid risk of ignition during installation and maintenance appropriate safety measures against electrostatic discharge (ESD) are to be considered.

For installation in a potentially explosive gas atmosphere the following instructions apply:

To avoid risk of ignition due to electrostatic discharge (ESD) the transmitter shall be mounted in an enclosure providing a degree of protection of at least IP20 according to EN/IEC 60529.

Ambient temperature range:

T4: -40 ≤ Ta ≤ 85°C

T5: -40 ≤ Ta ≤ 60°C

T6: -40 ≤ Ta ≤ 40°C

For installation in a potentially explosive dust atmosphere, the following instructions apply:

The transmitter shall be mounted in a metal enclosure or equivalent that is providing a degree of protection of at least IP6X according to EN/IEC 60529 that is suitable for the application and correctly installed. Cable entries and blanking elements shall be used that are suitable for the application and correctly installed. The surface temperature of the enclosure is equal to the ambient temperature +20K for a dust layer with a maximum thickness of 5 mm.

Ambient temperature range:

T4: -40 ≤ Ta ≤ 85°C

For installation in a potentially explosive atmosphere in mines, the following instructions apply:

The transmitter shall be mounted in an enclosure providing a degree of protection of at least IP6X according to EN/IEC 60529. Cable entries and blanking elements shall be used that are suitable for the application and correctly installed.

Ambient temperature range:


T4: -40 ≤ Ta ≤ 85°C

ATEX Installation drawing 6333QA02-V3R0

! For safe installation of 6333A and 6343A the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area. Year of manufacture can be taken from the first two digits in the serial number.

ATEX Certificate KEMA 09ATEX 0147 X
Marking Ex II 3 G Ex nA [ic] IIC T6..T4 Gc
II 3 D Ex ic IIIC Dc

Standards EN 60079-0 : 2012, EN 60079-11 : 2012,
EN 60079-15 : 2010

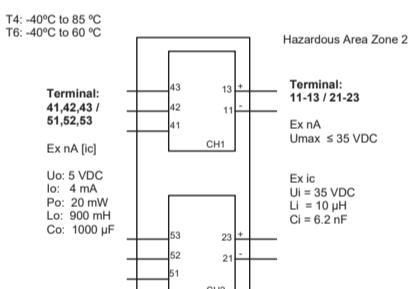

General installation instructions

To avoid risk of ignition during installation and maintenance appropriate safety measures against electrostatic discharge (ESD) are to be considered.

For installation in a potentially explosive gas atmosphere, the following instructions apply:

If the transmitter is applied in type of protection "Ex nA", it shall be installed in an enclosure that is Ex nA certified according to IEC-EN 60079-15, or "Ex e" certified and suitable for the application and correctly installed.

Cable entry devices and blanking elements shall fulfill the same requirements

For installation in a potentially explosive dust atmosphere, the following instructions apply:

If the transmitter is supplied with an intrinsically safe signal "ic" and interfaces an intrinsically safe signal "ic" (e.g. a passive device), the transmitter shall be mounted in a metal enclosure that provides a degree of protection of at least IP6X according to EN/IEC 60529, and that is suitable for the application. Cable entry devices and blanking elements shall fulfill the same requirements. The surface temperature of the enclosure is equal to the ambient temperature +20K for a dust layer with a maximum thickness of 5 mm.

DECLARATION OF CONFORMITY

(6333Doc_101)

As manufacturer

PR electronics A/S, Lerbakken 10, DK-8410 Rønde
hereby declares that the following products:

Type: 6333
Name: 2-wire programmable transmitter
From serial no.: 1517871082

is in conformity with the following directives and standards:

The EMC Directive and later amendments

until 2016.04.19: 2004/108/EC

from 2016.04.20: 2014/30/EU

EN 61326-1: 2013

For specification of the acceptable EMC performance level, refer to the electrical specifications for the device.

The ATEX Directive and later amendments

until 2016.04.19: 94/9/EC

from 2016.04.20: 2014/34/EU

EN 60079-0 : 2012, EN 60079-11 : 2012,

EN 60079-15 : 2010 and EN 60079-26 : 2007

ATEX certificate: KEMA 09ATEX0147 X

Notified body

DEKRA Certification B.V. (0344)
Mander 1051, 6825 MJ Arnhem
P.O. Box 5185, 6802 ED Arnhem
The Netherlands

The RoHS2 Directive 2011/65/EU

The product has been manufactured according to Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

Stig Lindemann, CTO

Manufacturer's signature

IECEx Installation drawing 6333QI01-V1R0


! For safe installation of 6333B and 6343B the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area. Year of manufacture can be taken from the first two digits in the serial number.

IECEx Certificate IECEx DEK 14.0049X

Marking Ex ia IIC T6..T4 Ga
Ex ia IIIC Da
Ex ia I Ma

Standards IEC60079-11:2011, IEC60079-0: 2011, IEC60079-26:2006

Hazardous area Zone 0, 1, 2, 20, 21, 22



General installation instructions

To avoid risk of ignition during installation and maintenance appropriate safety measures against electrostatic discharge (ESD) are to be considered.

For installation in a potentially explosive gas atmosphere the following instructions apply:

To avoid risk of ignition due to electrostatic discharge (ESD) the transmitter shall be mounted in an enclosure providing a degree of protection of at least IP20 according to EN/IEC 60529.

Ambient temperature range:

T4: -40 ≤ Ta ≤ 85°C

T5: -40 ≤ Ta ≤ 60°C

T6: -40 ≤ Ta ≤ 40°C

For installation in a potentially explosive dust atmosphere, the following instructions apply:

The transmitter shall be mounted in a metal enclosure or equivalent that is providing a degree of protection of at least IP6X according to EN/IEC 60529 that is suitable for the application and correctly installed. Cable entries and blanking elements shall be used that are suitable for the application and correctly installed. The surface temperature of the enclosure is equal to the ambient temperature +20K for a dust layer with a maximum thickness of 5 mm.

Ambient temperature range:

T4: -40 ≤ Ta ≤ 85°C

For installation in a potentially explosive atmosphere in mines, the following instructions apply:

The transmitter shall be mounted in an enclosure providing a degree of protection of at least IP6X according to EN/IEC 60529. Cable entries and blanking elements shall be used that are suitable for the application and correctly installed.

Ambient temperature range:

T4: -40 ≤ Ta ≤ 85°C

CSA Installation drawing 6333QC01-V1R0

! Hazardous (Classified) Location
IS,Class I, Division 1, Group A,B,C,D T4..T6
Ex ia IC T4..T6 Ga
Class I, Zone 0, AEx ia IIC T4..T6 Ga

Non Hazardous Location

T6: -40 ≤ Ta ≤ 60°C
T4: -40 ≤ Ta ≤ 85°C

Terminal: 41,42,43
Connect to passive or non-energy storing devices such as RTD's Resistors and Thermocouples only.

Terminal: 11,13 and 21,23
CH1

6333B1A

Co(Ca) > Σ(Ci+Ccable)
Lo(La) > Σ (Li+Lcable)

Installation notes

The Transmitter must be installed in a suitable enclosure to meet installation codes stipulated in The Canadian Electrical Code (CEC).

Substitution of components may impair intrinsic safety.

Hazardous (Classified) Location
IS,Class I, Division 1, Group A,B,C,D T4..T6
Ex ia IC T4..T6 Ga
Class I, Zone 0, AEx ia IIC T4..T6 Ga

Non Hazardous Location

T6: -40 ≤ Ta ≤ 60°C
T4: -40 ≤ Ta ≤ 85°C

Terminal: 41,42,43
51,52,53
Connect to passive or non-energy storing devices such as RTD's Resistors and Thermocouples only.

Terminal: 11,13 and 21,23
CH1


6333B1B

Co(Ca) > Σ(Ci+Ccable)
Lo(La) > Σ (Li+Lcable)

Hazardous (Classified) Location
Class I, Division 1, Group A,B,C,D T4..T6
Ex ia IC T4..T6 Ga
Class I, Zone 0, AEx ia IIC T4..T6

Non Hazardous Location

T6: -40 ≤ Ta ≤ 60°C
T4: -40 ≤ Ta ≤ 85°C



Installation notes


For installation in Class I the Transmitter must be installed in a suitable enclosure to meet installation codes stipulated in The National Electrical Code (ANSI-NFPA 70). Equipment that is FM-approved for intrinsic safety may be connected to barriers based on the Entity Concept. This concept permits interconnection of approved transmitters, meters and other devices in combinations, which have not been specifically examined by FM, provided that the agency's criteria are met. The combination is then intrinsically safe, if the entity concept is acceptable to the authority having jurisdiction over the installation.

The entity concept criteria are as follows: The intrinsically safe devices, other than barriers, must not be a source of energy. The maximum voltage U_{MAX} and current I_{MAX}, and maximum power P_{MAX}, which the device can receive and remain intrinsically safe, must be equal to or greater than the voltage (U_o or V_O or V_I) and current (I_o or I_C or I_T) and the power P_o which can be delivered by the barrier. The sum of the maximum unprotected capacitance (C_i) for each intrinsically safe device and the interconnecting wiring must be less than the inductance (L_i) for each intrinsically safe device and the interconnecting wiring must be less than the inductance (L_a) which can be safely connected to the barrier. The entity parameters U_o, V_O and I_o and I_C and Ca and La for barriers are provided by the barrier manufacturer.

Hazardous (Classified) Location
Class I, Division 2, Group A,B,C,D T4..T6
Class I, Zone 2, IIC, T4..T6

Non Hazardous Location

T6: -40 ≤ Ta ≤ 60°C
T4: -40 ≤ Ta ≤ 85°C



Installation notes

The Transmitter must be installed in a suitable enclosure to meet installation codes stipulated in The National Electrical Code (ANSI-NFPA 70).

To assure a Non-Incendive system the transmitter and associated apparatus must be wired in accordance with the associated apparatus manufacturers field wiring instructions and the circuit diagram shown above.

IECEx Installation drawing 6333QI02-V1R0

! For safe installation of 6333A and 6343A the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area. Year of manufacture can be taken from the first two digits in the serial number.

IECEx Certificate IECEx DEK 14.0049X

Marking Ex nA [ic] IIC T6..T4 Gc
Ex ic IIC Dc

Standards IEC 60079-0 : 2011, IEC 60079-11 : 2011, IEC 60079-15 : 2010

T4: -40°C to 85 °C

T6: -40°C to 60 °C

Terminal: 41,42,43 / 51,52,53

Ex nA [ic]