




**7501 IECEX Installation**

For safe installation of 7501 the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards (IEC60079-14) that apply to this area.  
Year of manufacture can be taken from the first two digits in the serial number.

**Ex ia installation:**  
Certificate IECEx DEK 15.0039 X  
Marking Ex ia IIC T6, T4 Ga  
Ex ia IIC T100°C Da  
Ex ia I Ma (7501B)

Standards: IEC 60079-0:2011, IEC 60079-11:2011, IEC 60079-26:2007

**Hazardous area**  
Zone 0, 1, 2, 20, 21, 22, Minas  
T4: -40 ≤ Ta ≤ 85°C T100°C (7501A)  
T4: -40 ≤ Ta ≤ 85°C T100°C (7501B)  
T6: -40 ≤ Ta ≤ 60°C T75°C  
T6: -40 ≤ Ta ≤ 45°C T80°C

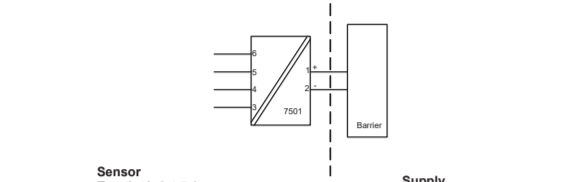

**Sensor**  
Terminal: 3,4,5,6  
Uo: 9.6 VDC  
Io: 28 mA  
Po: 67 mW  
Li: 35 mH  
Ci: 3.5 µF

**Supply**  
Terminal: 1,2  
Uo: 30 VDC  
Io: 120 mA  
Po: 0.84 W  
Li: 0 µH  
Ci: 2 nF

**Ex nA, ic installation:**

For an ambient temperature exceeding 70°C, heat resistant cables and cable glands suitable for at least 90°C shall be used.

If the transmitter is physically connected to a possible source of heating or cooling, e.g. by mounting to a process pipe or a temperature sensor, the temperature at the point of connection shall be within the ambient temperature range as given in the certificate.

Cable entries and blanking elements shall be used that are suitable for the application and correctly installed.  
The enclosure must be connected to the potential matching line.  
Applied screw terminal torque is max. 0.4 Nm on all terminals.

Protection degree of IP 54 according to EN 60529 is achieved if certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed.

Protection degree of IP 68 according to EN 60529 is only achieved if certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed with sealing washers or Locite sealant added to the threads of the sensor, blanking elements and cable glands.

For group III (dust), electrostatic charging of the paint layer shall be avoided.



**Terminal: 3,4,5,6**  
Sensor: RTD or TC

**Terminal: 1,2**  
Umax: 35 VDC


**FM Installation drawing 7501**

For safe installation of 7501 the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area.

Pour une mise en œuvre de 7501 en toute sécurité, les préconisations ci-dessous doivent être observées. Le module doit être mis en œuvre par du personnel qualifié familier avec les Lois, Directives et Normes, nationales et internationales, qui s'appliquent à la zone d'installation.

**Intrinsic safe installation:**

Hazardous classified Location Class I,II,III, Division 1, Groups, ABCDEFG Class I, Zone 0, IIC, Zone 20  
T4: -40 ≤ Ta ≤ 85°C  
T4: -40 ≤ Ta ≤ 60°C  
T6: -40 ≤ Ta ≤ 45°C  
Zone 20 Temperature Class: -40 ≤ Ta ≤ 85°C T100 °C -40 ≤ Ta ≤ 85°C T100 °C T75 °C -40 ≤ Ta ≤ 45°C T80 °C

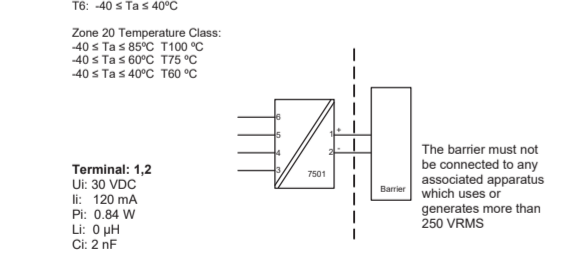

**Terminal: 1,2**  
Uo: 30 VDC  
Io: 120 mA  
Po: 0.84 W  
Li: 0 µH  
Ci: 2 nF

**Terminal: 3,4,5,6**  
Uo: 9.6 VDC  
Io: 28 mA  
Po: 67 mW  
Li: 35 mH  
Ci: 3.5 µF

UM < 250V  
Voc or Uo < Vmax or Uo  
Isc or Io < Imax or Io  
Po < Pi  
Ca or Co > Ci + Ccable  
La or Lo > Li + Lcable

**Ex ia installation**

General installation instructions  
The sensor circuit is not intrinsically isolated from the supply output circuit. However, the galvanic isolation between the circuits is capable of withstanding a test voltage of 500V ac during 1 minute.


The enclosure must be connected to the potential matching line.  
If the transmitter is physically connected to a possible source of heating or cooling, e.g. by mounting to a process pipe or a temperature sensor, the temperature at the point of connection shall be within the ambient temperature range as given in the certificate.  
Cable entries and blanking elements shall be used that are suitable for the application and correctly installed.

For installation of 7501A in zone 0 / EPL Ga, the transmitter must be installed such, that even in the event of rare incidents, ignition sources due to impact and friction, sparks are excluded.

Protection degree of IP 54 according to IEC 60529 is achieved if certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed.

Protection degree of IP 68 according to IEC 60529 is only achieved if certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed with sealing washers or Locite sealant added to the threads of the sensor, blanking elements and cable glands.

For group III (dust), electrostatic charging of the paint layer shall be avoided.



**Sensor**  
Terminal: 3,4,5,6  
Uo: 9.6 VDC  
Io: 28 mA  
Po: 67 mW  
Li: 35 mH  
Ci: 3.5 µF

**Supply**  
Terminal: 1,2  
Uo: 30 VDC  
Io: 120 mA  
Po: 0.84 W  
Li: 0 µH  
Ci: 2 nF

**Ex d, tb installation:**

Certificate IEC DEK 15.0039 X  
Marking Ex d IIC T6, T4 Gb  
Ex tb IIC T100°C Db

Standards: IEC 60079-0:2011, IEC 60079-1:2007, IEC 60079-31:2013

**Type of protection Ex d**  
T4, T5: -40 ≤ Ta ≤ 85°C (7501A)  
T4, T5: -40 ≤ Ta ≤ 85°C (7501B)  
T6: -40 ≤ Ta ≤ 70°C

**Type of protection Ex tb**  
O-ring Sealing - Silicone  
T4: -40 ≤ Ta ≤ 85°C T100°C (7501A)  
T4: -40 ≤ Ta ≤ 85°C T100°C (7501B)  
T6: -40 ≤ Ta ≤ 70°C T85°C

O-ring Sealing - FKM  
T4: -20 ≤ Ta ≤ 85°C T100°C (7501A)  
T4: -20 ≤ Ta ≤ 85°C T100°C (7501B)  
T6: -20 ≤ Ta ≤ 70°C T85°C

Protection degree of IP 54 according to EN 60529 is achieved if Ex d certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed.

Protection degree of IP 68 according to IEC 60529 is only achieved if Ex d certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed with sealing washers or Locite sealant added to the threads of the sensor, blanking elements and cable glands.

The display cover must be screwed all the way in and the safety catch must be fastened before putting internal capacitors to discharge, or do not open display cover unless area is known to be safe.

For an ambient temperature exceeding 70 °C, heat resistant cables and cable glands suitable for at least 90°C shall be used.

The enclosure must be connected to the potential matching line.  
When the process temperature range exceeds the service temperature range it shall be verified by on-site temperature measurements, taking the worst case conditions into account, that the service temperature does not exceed the range of the module.

For group III (dust), electrostatic charging of the paint layer shall be avoided.

No modification to the enclosure is allowed by the customer except as mentioned in the manual or installation drawing.

**The entity concept**

The Transmitter must be installed according to National Electrical Code (ANSI-NFPA 70) and shall be installed with the enclosure, mounting, and spacing segregation requirement of the ultimate application.

Equipment that is FM-approved for intrinsic safety may be connected to barriers based on the ENTITY CONCEPT. This concept permits interconnection of approved transmitters, meters and other devices in combinations which have not been specifically examined by FM, provided that the agency's criteria are met. The combination is then intrinsically safe. If the entity concept is accepted by the authority having jurisdiction over the installation.

The entity concept criteria are as follows:  
The intrinsically safe devices, other than barriers, must not be a source of power.  
The maximum voltage (Uo/Vmax) and current (Io/Imax), and maximum power (Po/Pmax), which the device can receive and remain intrinsically safe, must be equal to or greater than the voltage (Uo or Vo, or Vi) and current (Io or Ii or Ii) and the power (Po) which can be delivered by the barrier.

The sum of the maximum unprotected capacitance (C) for each intrinsically device and the interconnecting wiring must be less than the capacitance (Cc) which can be safely connected to the barrier.

The sum of the maximum unprotected inductance (L) for each intrinsically device and the interconnecting wiring must be less than the inductance (Lc) which can be safely connected to the barrier.

The entity parameters Uo/Voc or Vi and Io/Imax or Ii, and Cc and Lc for barriers are provided by the barrier manufacturer.  
For Class II and Class III installations where rigid conduit is not used, seal cable entries against dust and fires using a NRTL listed cable gland fitting.



**Terminal: 3,4,5,6**  
Sensor: RTD or TC

**Terminal: 1,2**  
Umax: 35 VDC

**Ex nA, ic installation:**


Certificate IECEx DEK 15.0039 X  
Marking Ex nA IIC T6, T4 Gc  
Ex ic IIC T6, T4 Gc  
Ex ic IIC T100°C Dc

Standards: IEC 60079-0:2011, IEC 60079-11:2011, IEC 60079-15:2010

**Type of protection Ex nA**  
O-ring Sealing - Silicone  
T4: -40 ≤ Ta ≤ 85°C T4 (7501A)  
T4: -40 ≤ Ta ≤ 85°C T4 (7501B)  
T6: -40 ≤ Ta ≤ 60°C T6

**Type of protection Ex ic**  
T4: -40 ≤ Ta ≤ 85°C T100°C (7501A)  
T4: -40 ≤ Ta ≤ 85°C T100°C (7501B)  
T6: -40 ≤ Ta ≤ 60°C T6

O-ring Sealing - FKM  
T4: -20 ≤ Ta ≤ 85°C (7501A)  
T4: -20 ≤ Ta ≤ 85°C (7501B)  
T6: -20 ≤ Ta ≤ 60°C T6

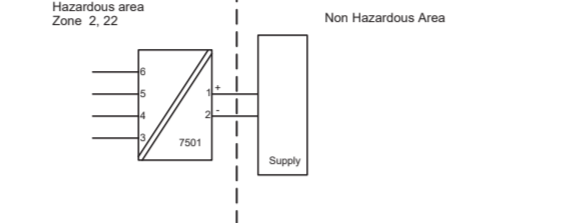

**Sensor**  
Terminal: 3,4,5,6  
Uo: 9.6 VDC  
Io: 28 mA  
Po: 67 mW  
Li: 35 mH  
Ci: 3.5 µF

**Supply**  
Terminal: 1,2  
Uo: 35 VDC  
Li: 0 µH  
Ci: 2 nF

**Supply**  
Terminal: 1,2  
Ex nA  
Umax: 35 VDC

**Ex d, tb installation**

The transmitter is intended, either to be connected via a cable, or to be mounted directly onto a temperature sensing probe.  
Only IECEX equipment certified sensors, suitable for the application and correctly installed, may be mounted directly onto the Transmitter without additional certification of the combination.

If the transmitter is physically connected to a possible source of heating or cooling, e.g. by mounting to a process pipe or a temperature sensor, the temperature at the point of connection shall be within the ambient temperature range as given in the certificate. The sensor shall be suitable for use as any device on an Ex d enclosure and shall not add volume to the 7501 enclosure. The thread of the sensor must be in compliance with IEC60079-1/IEC60079-31

Unused cable entries must be sealed by the blanking elements 8550-xxx and 8551-xxx supplied with the 7501 or other Ex d and/or Ex tb certified blanking elements suitable for the application.

Only Ex d and/or Ex tb certified cable and cable glands shall be used that are suitable for the application and correctly installed.

Protection degree of IP 54 according to IEC 60529 is achieved if Ex d certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed.

Protection degree of IP 68 according to IEC 60529 is only achieved if Ex d certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed with sealing washers or Locite sealant added to the threads of the sensor, blanking elements and cable glands.

The display cover must be screwed all the way in and the safety catch must be fastened before putting internal capacitors to discharge, or do not open display cover unless area is known to be safe.

For an ambient temperature exceeding 70 °C, heat resistant cables and cable glands suitable for at least 90°C shall be used.

The enclosure must be connected to the potential matching line.  
When the process temperature range exceeds the service temperature range it shall be verified by on-site temperature measurements, taking the worst case conditions into account, that the service temperature does not exceed the range of the module.

For group III (dust), electrostatic charging of the paint layer shall be avoided.

No modification to the enclosure is allowed by the customer except as mentioned in the manual or installation drawing.

**Non Incendive installation:**


Hazardous classified Location Class I,II,III, Division 2, Groups, ABCDFG Class I, Zone 2, IIC

Non classified Location

Normas ABNT NBR IEC 60079-0: 2013, ABNT NBR IEC 60079-1: 2014, ABNT NBR IEC 60079-31: 2014

**Ex d, tb**  
T4, T5: -40 ≤ Ta ≤ 85°C  
T4, T5: -40 ≤ Ta ≤ 85°C

**Ex tb**  
Anel de vedação O: Silicone  
-40 ≤ Ta ≤ 85°C T100°C (7501A)  
-40 ≤ Ta ≤ 85°C T100°C (7501B)  
-40 ≤ Ta ≤ 70°C T100°C

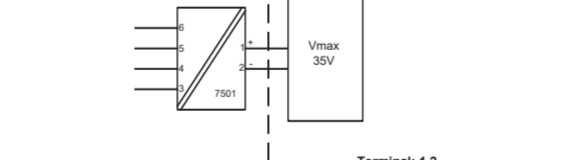

**Terminal: 3,4,5,6**  
Sensor: RTD or TC

**Terminal: 1,2**  
Umax: 35 VDC


O-ring Sealings  
Silicone rubber: -40°C Ta ≤ +85°C  
FKM rubber: -20°C Ta ≤ +85°C

Protection: Indoor and Outdoor TYPE 4X or IP68

**Explosion proof / Dust Ignition proof installation**

Hazardous area Class I, II, III, Division 1, Groups ABCDEFG  
Class I Zone 1, ExIAX d IIC T6

Non Hazardous Area

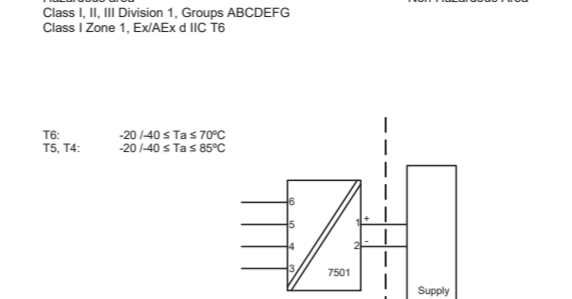

**Terminal: 3,4,5,6**  
Sensor: RTD or TC

**Terminal: 1,2**  
Umax: 35 VDC

O-ring Sealings  
Silicone rubber: -40°C Ta ≤ +85°C  
FKM rubber: -20°C Ta ≤ +85°C

Protection: Indoor and Outdoor Type 4X or IP68

**Instalação do Ex ia**

O circuito do sensor não é intrinsecamente galvanicamente isolado do circuito de saída de alimentação. Contudo, a isolamento galvanico entre os circuitos é capaz de resistir a teste de tensão de 500V ac durante 1 minuto.

O equipamento deve ser conectado à linha potencial correspondente.  
Se o transmissor estiver fisicamente conectado a uma possível fonte de calor ou resfriamento, por exemplo, através da montagem de um tubo de processo ou sensor de temperatura, a temperatura no ponto de conexão deve estar entre a faixa de temperatura ambiente determinada no certificado ou neste manual.

As entradas dos cabos e elementos de supressão devem ser usadas adequadamente para aplicação INMETRO, aprovada e instalada corretamente.

Para instalação 7501A em zona 0 / EPL Ga, se aplicam as seguintes instruções: O transmissor deve ser instalado de modo que, mesmo em um evento raro de incidente, fontes de ignição devido a impactos e fricção, faíscas sejam evitadas.

O grau de proteção do IP 54 de acordo com a ABNT NBR IEC 60529 é alcançado se o certificado prensa-cabos ou dispositivos de entrada de condutos são usados e adequados para a aplicação e instalados corretamente.

O grau de proteção do IP 68 de acordo com a ABNT NBR IEC 60529 é apenas alcançado se o certificado prensa-cabos ou dispositivos de entrada de condutos são usados e adequados para a aplicação e instalados corretamente com selos de vedação ou selante Locite adicionados para as linhas do sensor, elementos de supressão e prensa-cabos.

Para o grupo III (poeiras), deve ser evitada a carga eletrostática da camada de tinta.


**Instalação Ex tb, Ex db:**

Certificado DEKRA 15.0014X  
Marca Ex db IIC T6, T4 Gb  
Ex tb IIC T100°C Db

Normas ABNT NBR IEC 60079-0: 2013, ABNT NBR IEC 60079-1: 2014, ABNT NBR IEC 60079-31: 2014

**Ex db:**  
T4, T5: -40 ≤ Ta ≤ 85°C (7501A)  
T4, T5: -40 ≤ Ta ≤ 85°C (7501B)  
T6: -40 ≤ Ta ≤ 70°C

**Ex tb:**  
Anel de vedação O: Silicone  
-40 ≤ Ta ≤ 85°C T100°C (7501A)  
-40 ≤ Ta ≤ 85°C T100°C (7501B)  
-40 ≤ Ta ≤ 70°C T100°C

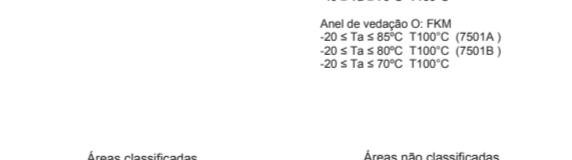

**Terminal: 3,4,5,6**  
Sensor: RTD ou TC

**Terminal: 1,2**  
Alimentação: 35 VDC

**Explosion proof / Dust Ignition proof installation**

The enclosure must be installed such, that even in the event of rare incidents, ignition sources due to impact and friction, sparks are excluded.

Unused cable entries must be sealed by approved sealing plugs.  
Certified cable and cable glands shall be used that are suitable for the application and correctly installed or the cables must be run in conduit.

For an ambient temperature exceeding 70 °C, heat resistant cables and cable glands suitable for at least 90°C shall be used.

For process temperatures above 85°C or below -20/-40°C installer must verify by measurements that the service temperature of the 7501 module is held within this range taking worst conditions into account.

The display cover must be screwed all the way in and the safety catch must be fastened before operation.  
Protection degree of IP 68 or TYPE IEX is only achieved if certified cable glands or conduit entry devices are used that are suitable for the application and correctly installed with sealing washers or Locite sealant is added to the threads of the sensor, blanking elements and cable glands.

The enclosure must be connected to the potential matching line.  
Do not open display cover unless area is known to be safe.

All openings for conduit and sensor connection must be in NPT threads.  
For Class I Group A installation, conduit seal is required within 18 inches of the enclosure.  
For Class I Zone I installation, conduit seal is required within 18 inches of the enclosure.

Attention:  
Ne pas ouvrir le couvercle de l'afficheur tant que la zone n'est pas réputée non explosible.  
Pour une mise en œuvre au Canada, les préconisations ci-dessous doivent être observées : Toutes les ouvertures d'entrée process et connexion de capteur doivent être munies de filetage NPT.

Pour une mise en œuvre en Classe I, Groupe A, des joints d'étanchéité doivent être mis en place à moins de 18 pouces du boîtier.  
Pour une mise en œuvre en Classe I, Zone I, des joints d'étanchéité doivent être mis en place à moins de 18 pouces du boîtier.

**Instalação Ex ic, Ex nA:**

Certificado DEKRA 15.0014X  
Marca Ex nA IIC T6, T4 Gc  
Ex ic IIC T6, T4 Gc

Normas ABNT NBR IEC 60079-0: 2013, ABNT NBR IEC 60079-15: 2012

**Ex ic:**  
Anel de vedação O: Silicone  
T4: -40 ≤ Ta ≤ 85°C (7501A)  
T4: -40 ≤ Ta ≤ 85°C (7501B)  
T6: -40 ≤ Ta ≤ 60°C

**Ex nA:**  
T4: -40 ≤ Ta ≤ 85°C T100°C (7501A)  
T4: -40 ≤ Ta ≤ 85°C T100°C (7501B)  
T6: -40 ≤ Ta ≤ 60°C